

WHENEVER I LEARN A NEW SKILL I CONCOCT ELABORATE FANTASY SCENARIOS WHERE IT LETS ME SAVE THE DAY.

OH NO! THE KILLER MUST HAVE FOLLOWED HER ON VACATION!



BUT TO FIND THEM WE'D HAVE TO SEARCH THROUGH 200 MB OF EMAILS LOOKING FOR SOMETHING FORMATTED LIKE AN ADDRESS!



IT'S HOPELESS!

EVERYBODY STAND BACK.



I KNOW REGULAR EXPRESSIONS.



1. Review of pipes
2. Regular expressions
3. sed
4. awk
5. Editing Files
6. Shell loops
7. Shell scripts

```
>0
TGCAGGTATATCTATTAGCAGGTTTAATTTTGCCTGCACTTGGTTGGGTACATTATTTTAAGTGTATTTGACAAG
>1
TGCAGGTTGTTGTTACTCAGGTCCAGTTCTCTGAGACTGGAGGACTGGGAGCTGAGAACTGAGGACAGAGCTTCA
>2
TGCAGGGCCGGTCCAAGGCTGCATGAGGCCTGGGGCAGAATCTGACCTAGGGGCCCTCTTGCTGCTAAAACCAT
>3
TGCAGGATCTGCTGCACCATTAACCAGACAGAAATGGCAGTTTTATACAAGTTATTATTCTAATTCAATAGCTGA
>4
TGCAGGGGTCAAATACAGCTGTCAAAGCCAGACTTTGAGCACTGCTAGCTGGCTGCAACACCTGCACTTAACCTC
```

cat seqs.fa

PIPE

grep ACGT

```
TGCAGGTATATCTATTAGCAGGTTTAATTTTGCCTGCACTTGGTTGGGTACATTATTTTAAGTGTATTTGACAAG
>1
TGCAGGTTGTTGTTACTCAGGTCCAGTTCTCTGAGACTGGAGGACTGGGAGCTGAGAACTGAGGACAGAGCTTCA
>2
TGCAGGGCCGGTCCAAGGCTGCATGAGGCCTGGGGCAGAATCTGACCTAGGGGCCCCTCTTGCTGCTAAAACCAT
>3
TGCAGGATCTGCTGCACCATTAACCAGACAGAAATGGCAGTTTTATACAAGTTATTATTCTAATTCAATAGCTGA
>4
TGCAGGGGTCAAATACAGCTGTCAAAGCCAGACTTTGAGCACTGCTAGCTGGCTGCAACACCTGCACTTAACCTC
```

cat seqs.fa

PIPE

grep ACGT

Does  
">0"  
contain "ACGT"?

Yes?

No?

Output NULL

```
>1
TGCAGGTTGTTGTTACTCAGGTCCAGTTCTCTGAGACTGGAGGACTGGGAGCTGAGAACTGAGGACAGAGCTTCA
>2
TGCAGGGCCGGTCCAAGGCTGCATGAGGCCTGGGGCAGAATCTGACCTAGGGGCCCTCTTGCTGCTAAAACCAT
>3
TGCAGGATCTGCTGCACCATTAACCAGACAGAAATGGCAGTTTTATACAAGTTATTATTCTAATTCAATAGCTGA
>4
TGCAGGGGTCAAATACAGCTGTCAAAGCCAGACTTTGAGCACTGCTAGCTGGCTGCAACACCTGCACTTAACCTC
```

cat seqs.fa

PIPE

grep ACGT

Does  
"TGCAGGTATATCTATTAGCAGGTTTAATTTTGCCTGCACTTG...G"  
contain "ACGT"?

Yes?

No?

Output NULL

```
TGCAGGTTGTTGTTACTCAGGTCCAGTTCTCTGAGACTGGAGGACTGGGAGCTGAGAACTGAGGACAGAGCTTCA
>2
TGCAGGGCCGGTCCAAGGCTGCATGAGGCCTGGGGCAGAATCTGACCTAGGGGCCCTCTTGCTGCTAAAACCAT
>3
TGCAGGATCTGCTGCACCATTAACCAGACAGAAATGGCAGTTTTATACAAGTTATTATTCTAATTCAATAGCTGA
>4
TGCAGGGGTCAAATACAGCTGTCAAAGCCAGACTTTGAGCACTGCTAGCTGGCTGCAACACCTGCACTTAACCTC
```

cat seqs.fa

PIPE

grep ACGT

Does  
">1"  
contain "ACGT"?

Yes?

No?

Output NULL

cat seqs.fa

PIPE

grep ACGT

Does  
"TGCAGGGGTCAAATACAGCTGTCAAAGCCAGACTTTGAGCAC...c"  
contain "ACGT"?

Yes?

No?

Output NULL

# Regular Expressions

Text often follows human conventions

Dates have a country-specific format:

Europe: day-month-year

US: month-day-year

Telephone numbers: xxx-xxx-xxxx

Zip codes must be five digits long

Structure: certain number of columns or rows

**Conventions can change:** prior to 2000, dates were always 3 sets of two numbers



# Regular Expressions, ctd.

If we can encode search context we can make much more powerful searches.

What sort of information would we like to specify?

Whether text is:

1. Composed of numbers
2. Composed of letter
3. A certain length
4. Full of spaces or tabs
5. First or last on the line



```
/h[a4@]([c<]([k]|\<))|([k]|\<))([x])\s+\n((d)|([t\+]h))[3ea4@]\s+p[l1][a4@]n[3e][t\+]/i
```

# Regular Expressions, ctd.

Encoding	Modern Equivalent	Pattern Type
.		a single character
+		one or more characters
*		zero or more characters
?		Maybe present
^		first on the line
\$		last on the line
[ 0-9 ]	\d	digits
[ a-zA-Z ]	\w	letters
,	\s \t	space
{ 3 }		must be exactly 3 characters long
{ 3 , 5 }		between 3-5 characters long
[ ACGT ]		a specific set of characters (a class)

# Regular Expressions, ctd.

Expression	Regular Expression
341341	.....
	[0-9]+
	[0-9]{6}
julian catchen	[a-z]+ [a-z]+
541-485-5128	[0-9]{3}\-[0-9]{3}\-[0-9]{4}
	[0-9\-]+
June 3, 1978	[a-zA-Z]+ [0-9], [0-9]{4}
AGCCCCTAGGACTGAAATTCC	[ACGT]+

# Regular Expressions, ctd.



Expression	Regular Expression
341341	"....."
	"[0-9]+"
julian catchen	"[a-z]+ [a-z]+"
541-485-5128	"[0-9]{3}\-[0-9]{3}\-[0-9]{4}"
	"[0-9\-]+"
June 3, 1978	"[a-zA-Z]+ [0-9], [0-9]{4}"
	"[a-zA-Z]+ [0-9]+, [0-9]{4}"
	"[a-zA-Z]+ ?[0-9]? , ? [0-9]{4}"

1. Decompress the file into your working directory:  

```
~/workshop_data/unix/record.tsv.gz
```
2. Use grep and search the file for the different patterns above:  

```
% grep -E "pattern" record.tsv
```
3. cat the file afterwards to examine what does and doesn't match with each pattern.

# sed, a stream editor

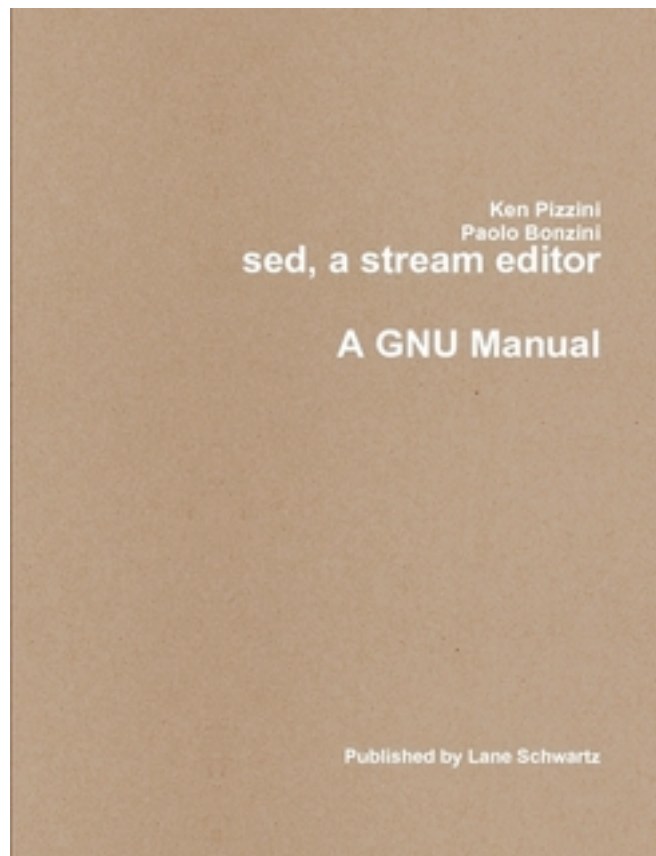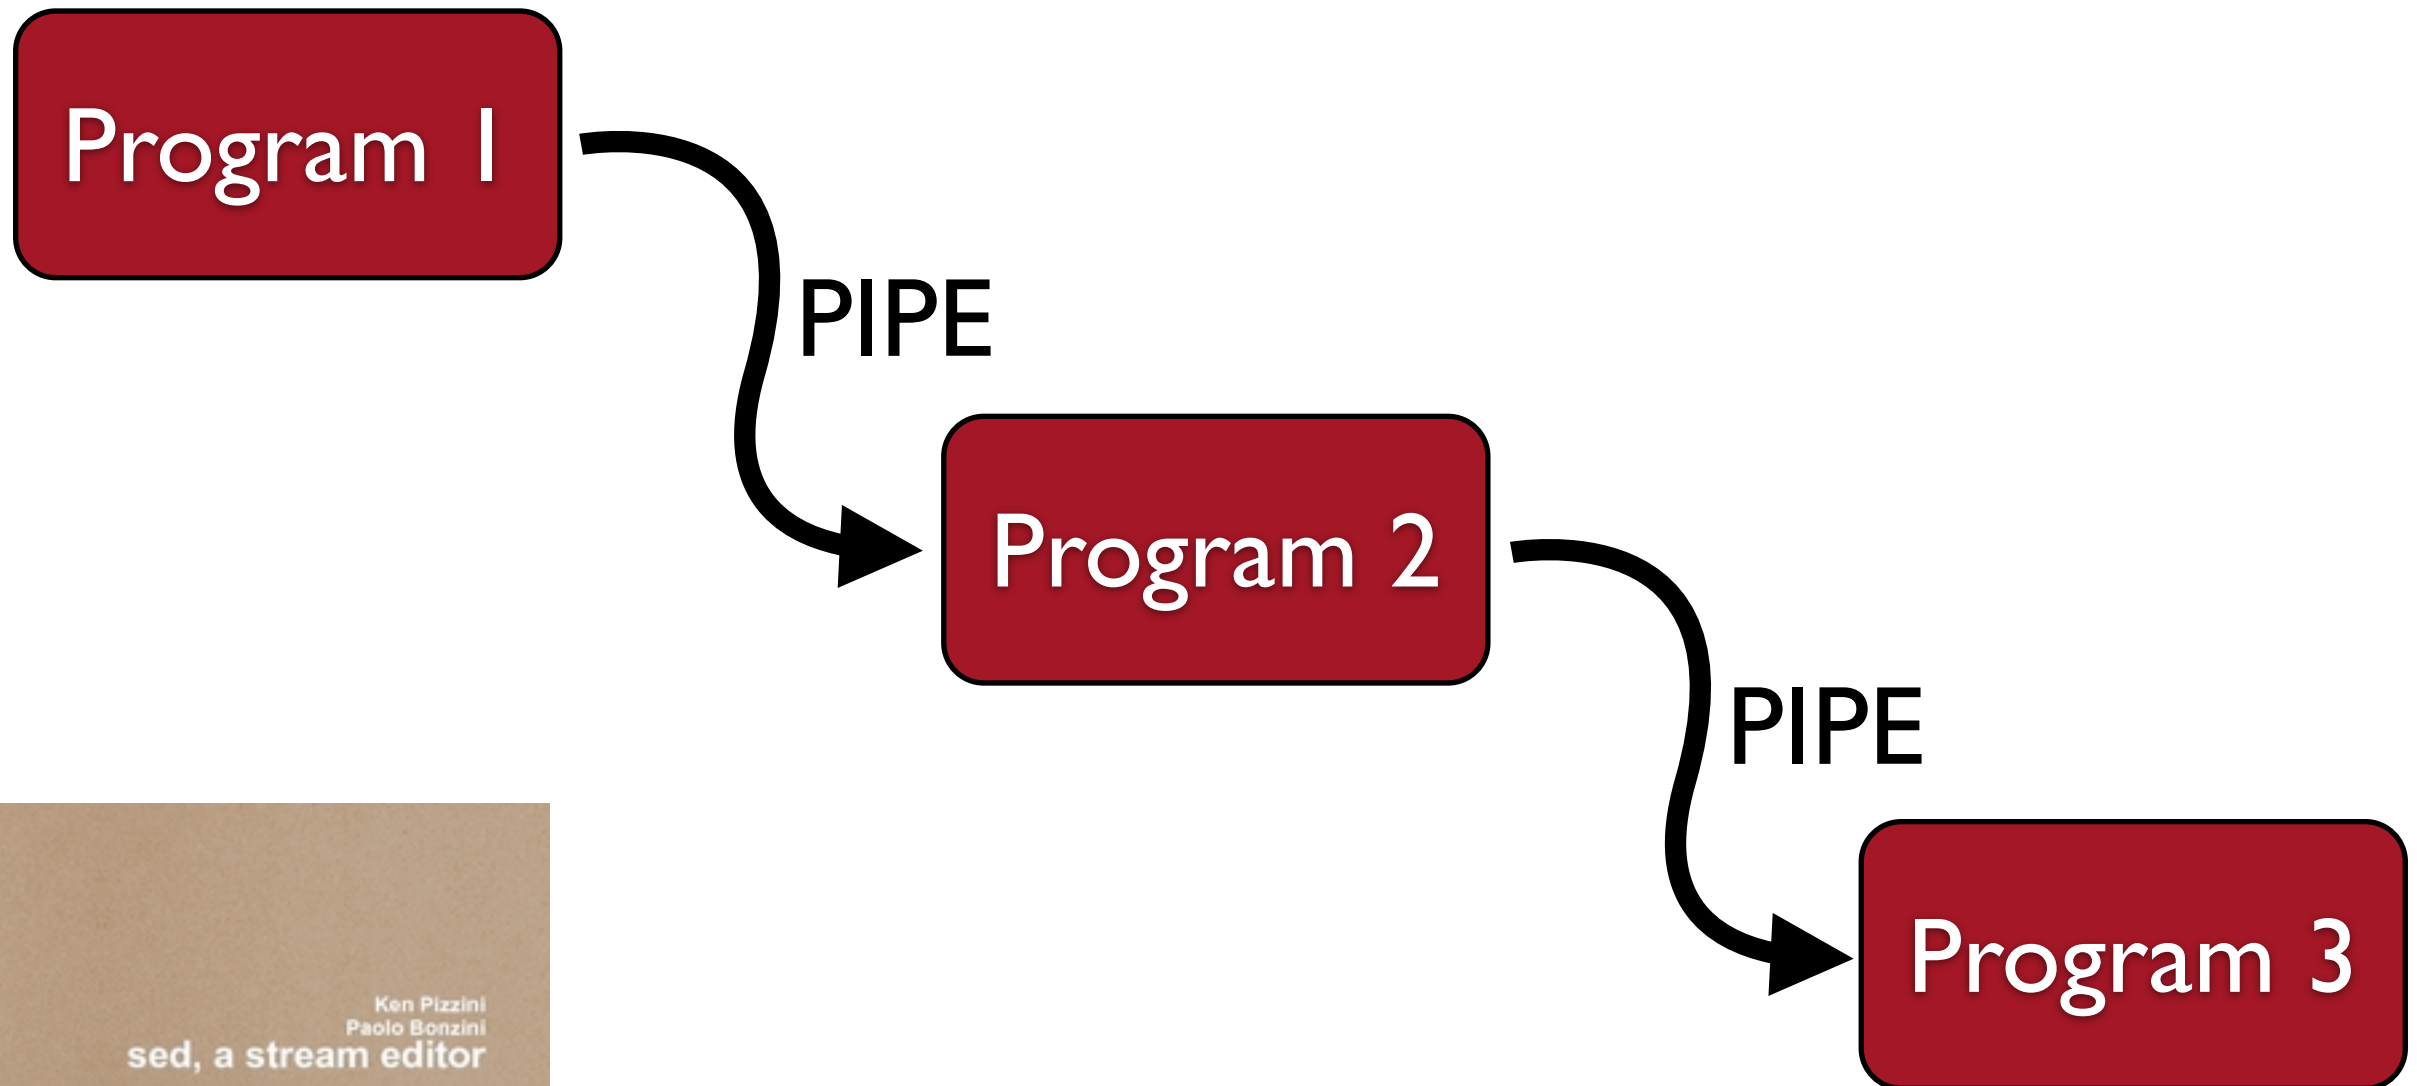

Search and replace on data flowing  
through the pipe (a stream)

**sed, a stream editor, ctd.**

`s/pattern/replace/`

Two new encodings:

Record a match: `(pattern)`

Back references: `\1 \2 \3`

```
% sed -E 's/[a-z]+ [a-z]+/foo/'
```

## sed, a stream editor, ctd.

`s/pattern/replace/`

```
% cat record.tsv | sed -E 's/[a-z]+ [a-z]+/foo/'  
  
% cat record.tsv | sed -E 's/([a-z]+) [a-z]+/\1/'  
  
% cat record.tsv | sed -E 's/[0-9]+//'  
  
% cat record.tsv | sed -E 's/[0-9]+//g'  
  
% cat record.tsv | sed -E 's/^[0-9]+ //'
```

**sed, a stream editor, ctd.**

**s/pattern/replace/**

**Create a complex command:**

```
% cd samples
```

```
% ls -l
```

```
fish_001.tags.tsv
```

```
fish_003.tags.tsv
```

```
fish_004.tags.tsv
```

```
fish_005.tags.tsv
```

```
% ls -l | sed -E 's/^(fish_[0-9]+\\.tags)\.tsv/mv \1\.tsv \1\.loc/'
```



# fish\_310.tags.tsv.gz

~/workshop\_data/unix/fish\_310.tags.tsv.gz

ls  
gunzip  
man  
more  
cat  
wc  
head  
cut  
grep  
sed  
tr  
>  
|

1. Decompress the file
2. Extract out the consensus sequences (2,191 sequences)
3. Extract out the ID and sequence for each consensus
4. Construct a sed expression to match the ID and consensus. Use sed to reverse the columns.
5. Use sed/tr to convert the two column input into to a FASTA file.

1. use ctrl-v tab to get a literal tab on the command line
2. The tr command can replace one single character with another. You could use it to replace the “|” character with a new line “\n” where “\n” will create a newline in the output.

# sed, a stream editor, ctd.

## Selecting specific lines

```
% cat s_1_sequence.txt | sed -n '6p'
```

```
% cat s_1_sequence.txt | sed -n '1,10p'
```

```
% cat s_1_sequence.txt | sed -n '2~4p'
```

## Keep your data files zipped

```
% gzip s_1_sequence.txt
```

```
% zcat s_1_sequence.txt.gz | sed -n '2~4p'
```

## Determine the count of all barcodes in the file

```
% zcat s_1_sequence.txt.gz | sed -n '2~4p' | cut -c 1-5 | sort -n | uniq -c | sort -n
```

**sed, a stream editor, ctd.**

**Edit the FASTQ headers**

`s_1_sequence.txt.gz`

`s/pattern/replace/`



1. Construct a sed expression to match the components of the FASTQ ID:

`HWI-EAS303_0002:1:1:1072:14491#0/1`

and remove the first element (`HWI-EAS303_0002:`)

2. Capture the output into a new FASTQ file

# awk, a stream programming language

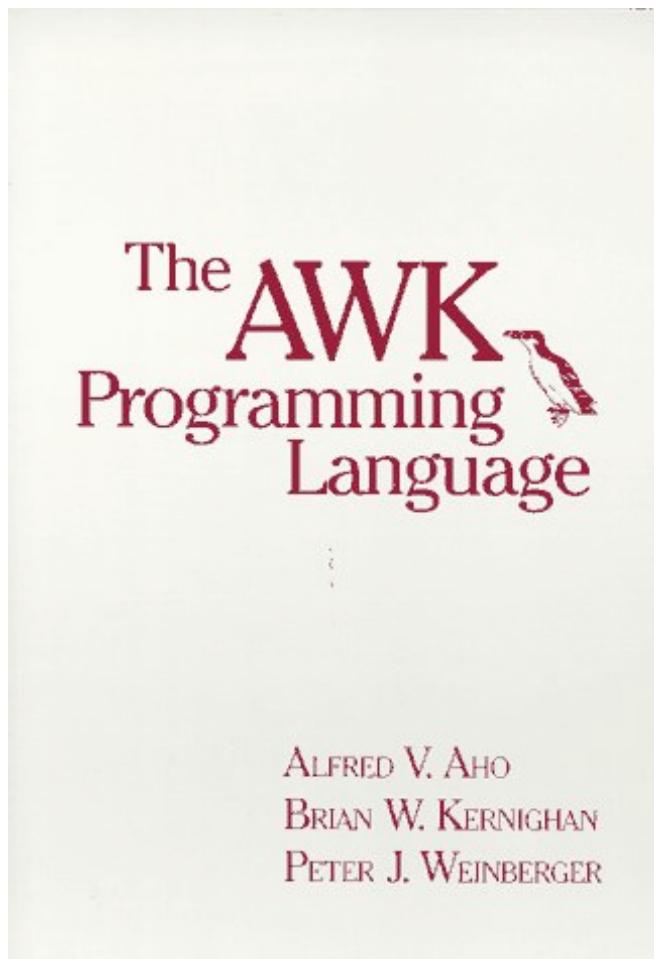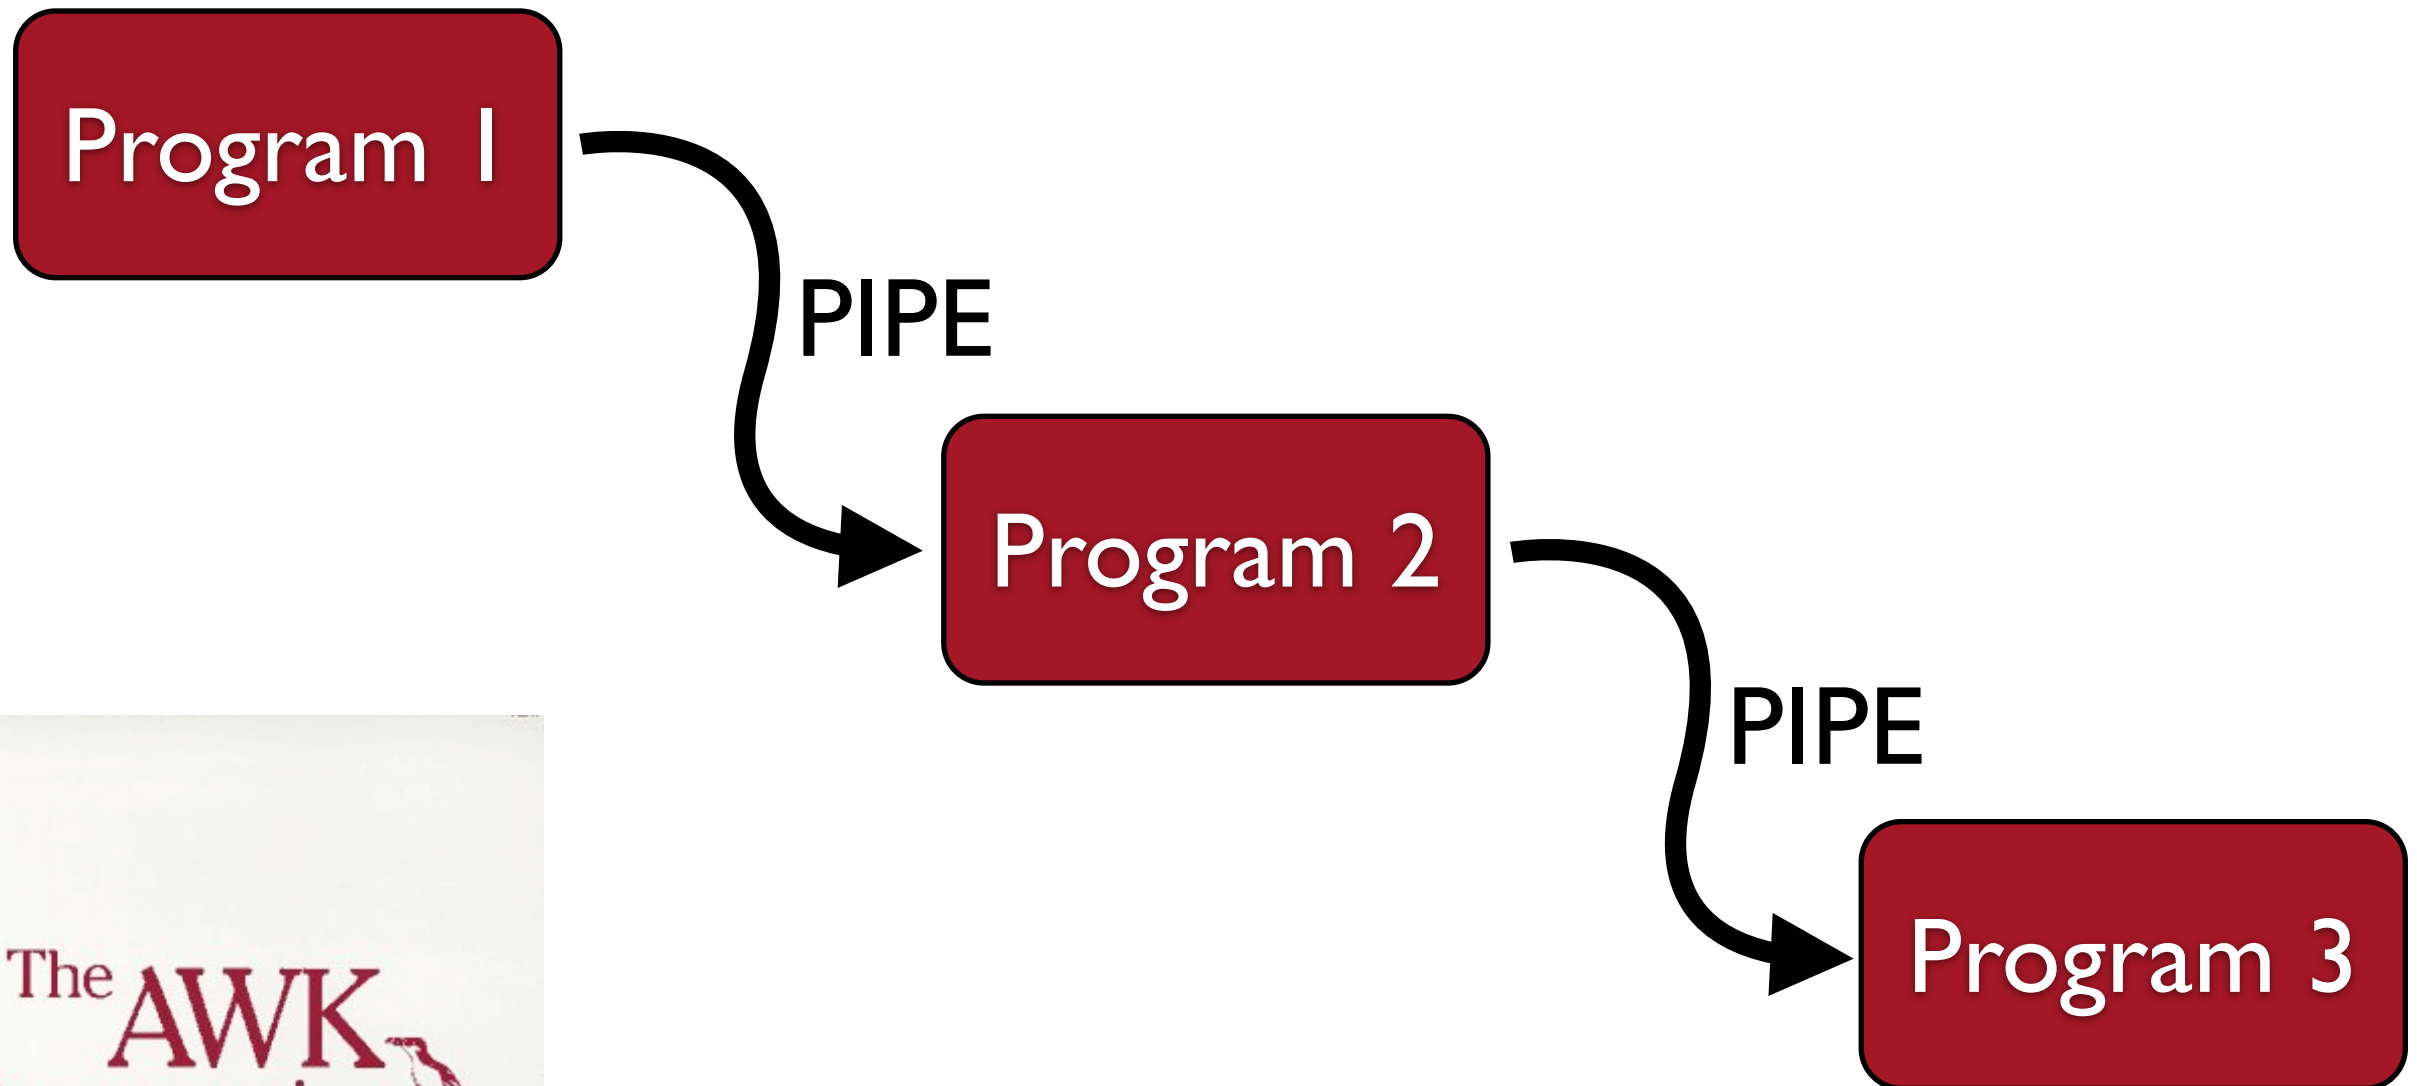

Apply formulas to data flowing through the pipe (a stream)

# awk, a stream programming language, ctd.

`pattern {action}`

## 1. Awk is column (*field*) aware:

\$0 - the whole line

\$1 - column one

\$2 - column two

...

## 2. `pattern` can be any logical statement:

`$3 > 0` - if column 3 is greater than 0

`$1 == 32` - if column 1 equals 32

`$1 == $3` - if column 1 equals column 3

`$1 == "consensus"` - if column 1 contains the string, "consensus"

If pattern is true, everything in {...} is executed

# awk, a stream programming language, ctd.

`pattern {action}`

Apply action to every line

Execute action  
once at start

`{action}`

`BEGIN {action} pattern {action}`

Execute  
action once  
at end

`pattern {action} END {action}`

`BEGIN {action} pattern {action} END {action}`

# awk, a stream programming language, ctd.

```
pattern {action1; action2; action3}
```

## 1. Built in variables

NR - number of records seen so far (aka line number)

NF - number of fields in the current record

FILENAME - name of the current file being read

## 2. Built in functions

length(x) - length of the field

print(x) - print a field

rand() - generate a random number

sqrt(x) - calculate square root of x

sub(x, y) - substitute s for r in \$0

## 3. User defined variables

increment: n = n + 1

multiply: n += \$2 \* \$3

# awk, a stream programming language, ctd.

Sum a series of numbers in the third column:

```
awk ' {sum+=$3} END {print sum} '
```

Sum a series of numbers in the third column larger than 500:

```
awk ' $3 > 500 {sum+=$3} END {print sum} '
```

Add line numbers to the output:

```
awk ' {print NR, $0} '
```

Print the length of each line:

```
awk ' {print length($0)} '
```

Compute the average:

```
awk ' {sum+=$3} END {print sum/NR} '
```



~/workshop\_data/unix/contigs.fa.gz

1. Determine the average contig length and the total length of all contigs.

1. Extract out the length from the Velvet FASTA headers
2. Sum them and compute the average


2. Determine the average and total length of contigs longer than 500bp.

~/workshop\_data/unix/trimmed\_reads.fq.gz

3. Determine the length distribution of the trimmed reads
  1. Extract out the sequence
  2. Measure its length
  3. Compute the distribution of lengths

ls  
man  
more  
cat  
head  
grep  
sed  
awk  
sort  
uniq  
|

# Unix History

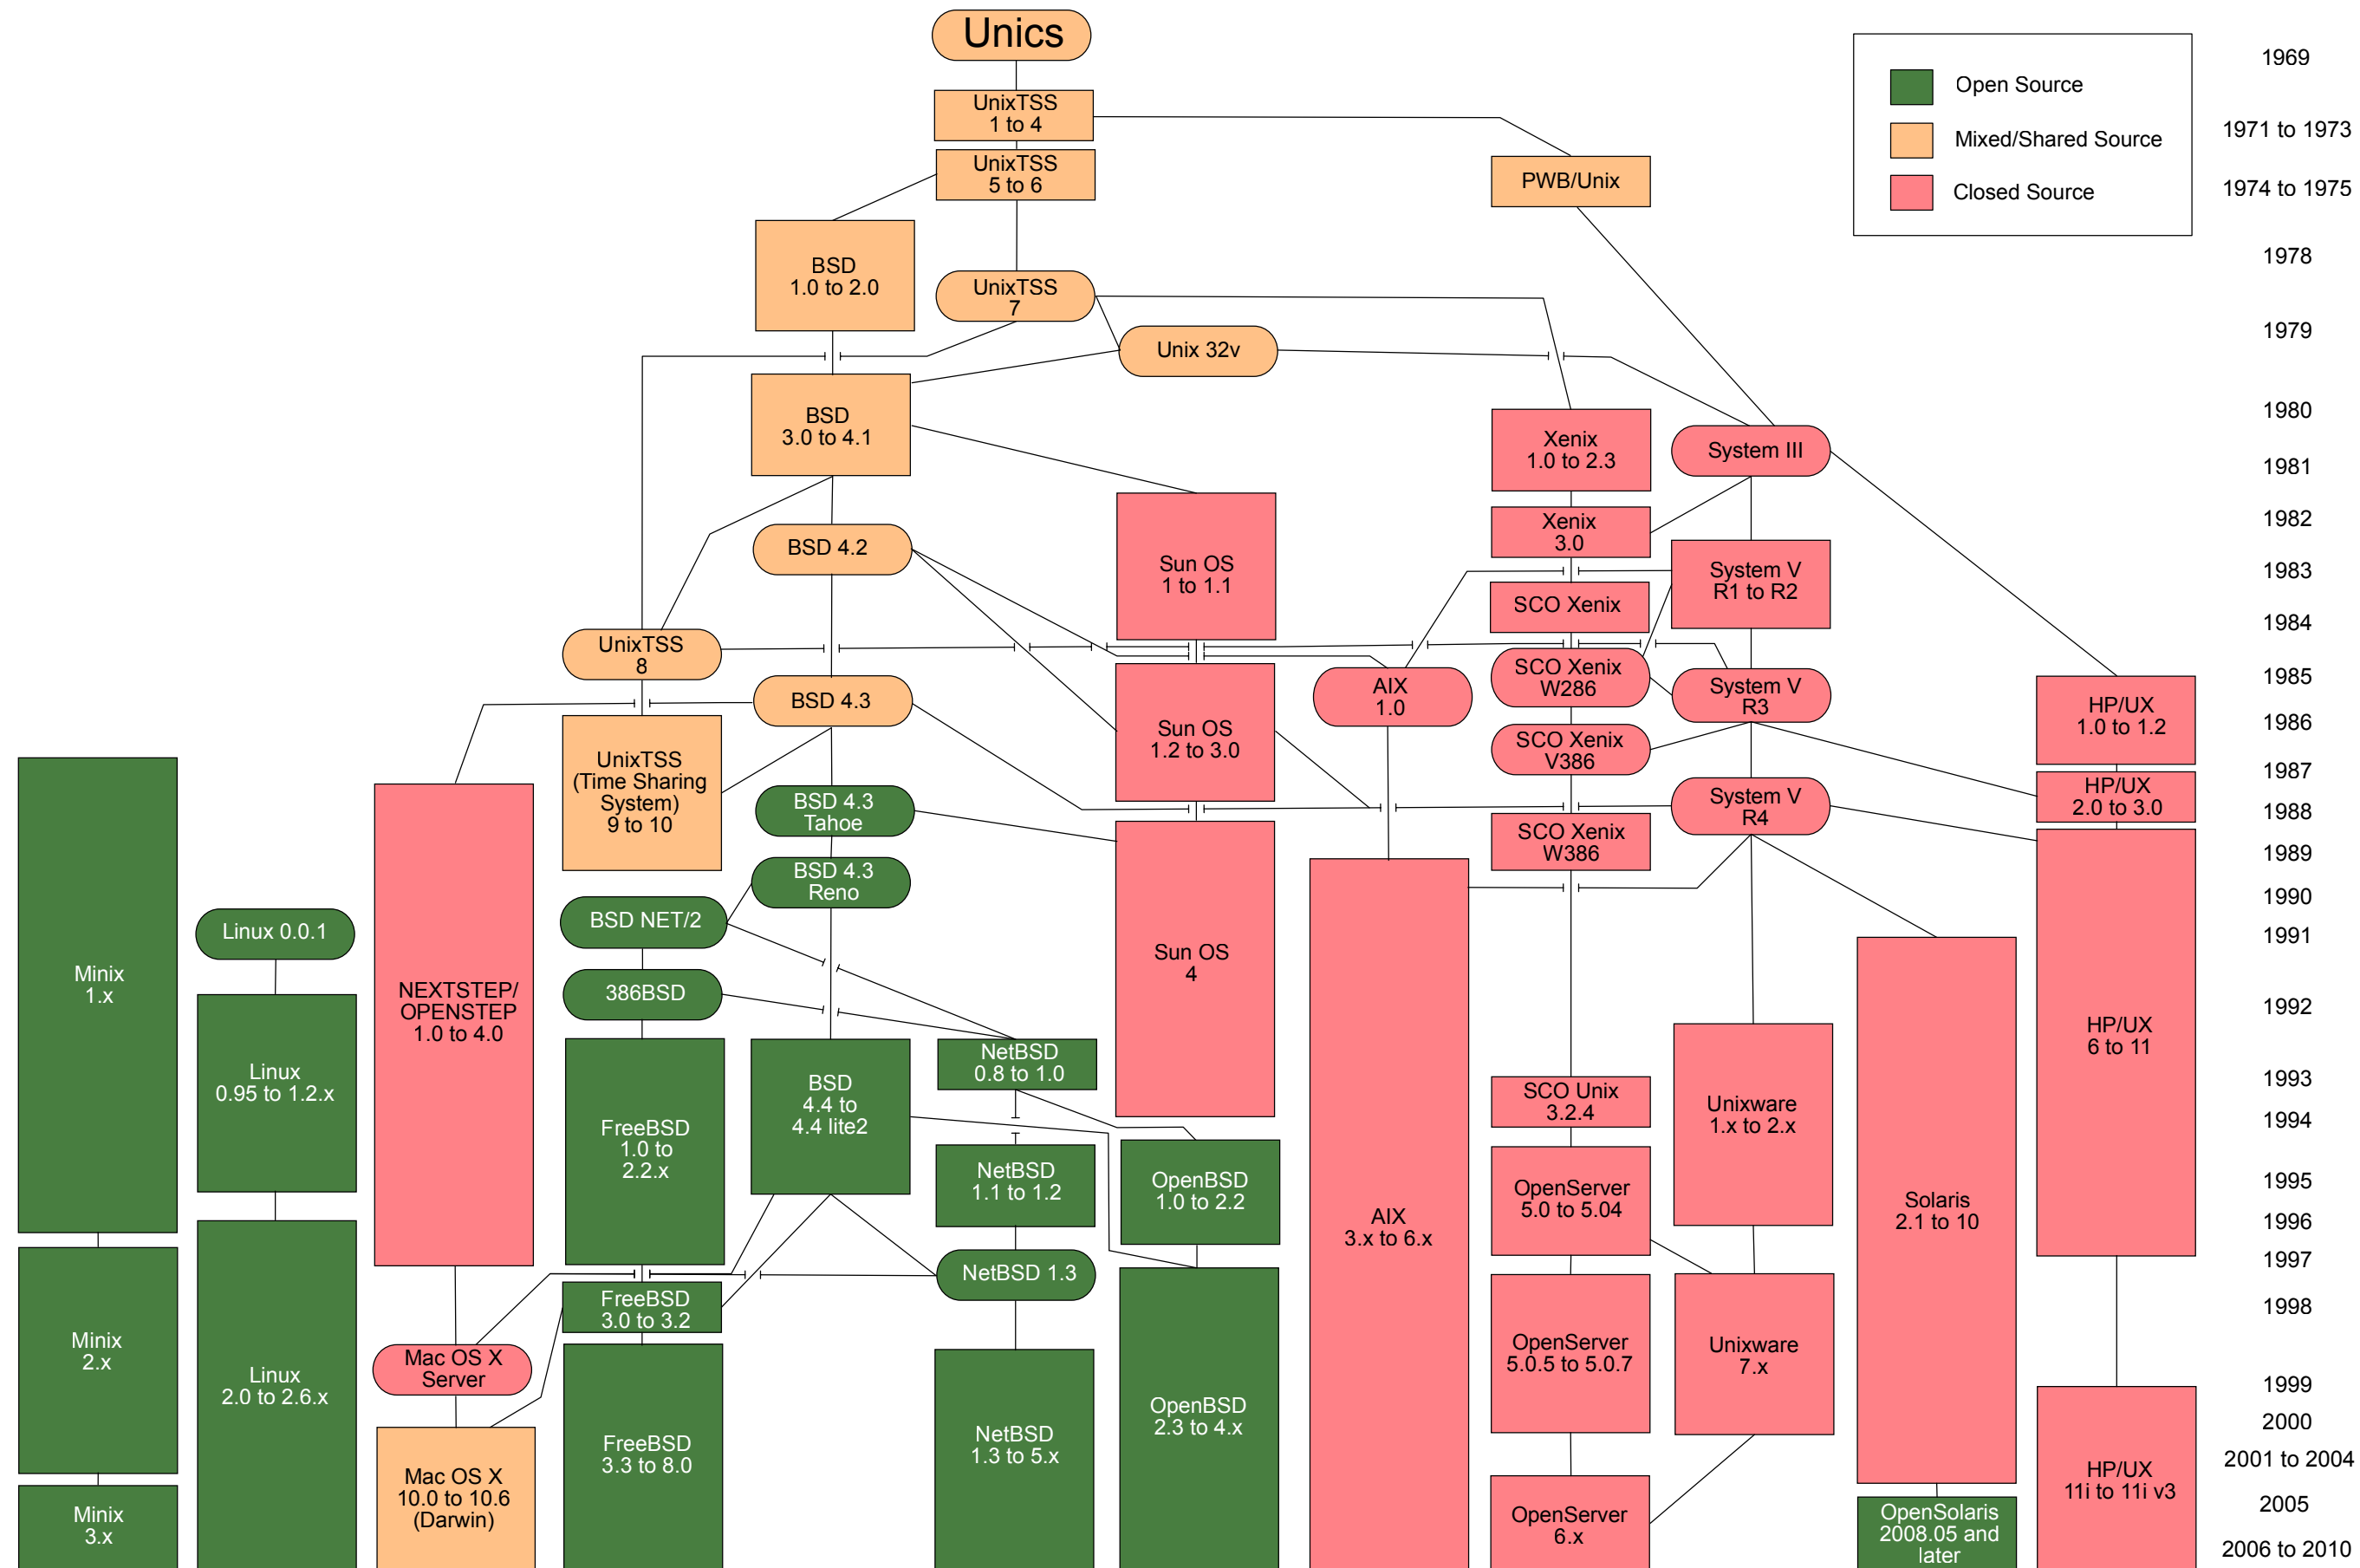

# Editing on UNIX



Emacs

Richard Stallman - 1976  
Founded GNU Project



Vi

Bill Joy - 1976  
BSD/Sun Microsystems

Decompress the example file into your home directory.

```
~/workshop_data/unix/manifesto.gz
```

```
% emacs <filename>
```

```
% emacs /absolute/path/to/file
```

```
% emacs ../../../relative/path/to/file
```

```
% emacs file1 /path/file2 ../../file3
```

## Command mode versus Text-entry mode

Your mouse cannot help you! (mostly.)

Emacs commands start with either **ctrl** or **meta** (esc-x)

# The Mark

1. No mouse, so we need a way to indicate/highlight regions of text.
2. `ctrl-space` sets the mark
3. Use the arrow keys to highlight a region of text
4. Issue a command, e.g. copy/paste, or just press the space bar to unhighlight

# Useful Emacs commands

<code>ctrl-x ctrl-s</code>	save file
<code>ctrl-x ctrl-f</code>	open a new file
<code>ctrl-space</code>	set the mark
<code>esc-w</code>	copy highlighted text
<code>ctrl-w</code>	cut highlighted text
<code>ctrl-y</code>	paste text
<code>ctrl-x u</code>	undo
<code>ctrl-x b</code>	switch to another file (buffer)
<code>ctrl-s</code>	search for text
<code>esc %</code>	search and replace text
<code>ctrl-]</code>	quit current command
<code>ctrl-v</code>	page-down
<code>esc-v</code>	page-up
<code>esc-g g</code>	goto line
<code>ctrl-x ctrl-c</code>	quit emacs

# manifesto.gz

`~/workshop_data/unix/manifesto.gz`

1. Start emacs, opening `manifesto`
2. Copy the title and paste it one line below.
3. Search for the term 'GNU', how many instances can you find?
4. Search/replace the phrase 'free software' with 'proprietary software'. How many instances did you replace?
5. Now, undo the replacements so that we remain free
6. Cut out the first paragraph of text.
7. Open a new file, `manifesto2`, paste the paragraph, save, quit emacs, view the file with `more`



# Download the example file using wget

1. Visit in your web browser:

`http://creskolab.uoregon.edu/stacks/`

2. Right click on the “Download Stacks” link and select “Copy Link Location” (or a similar variant)

3. Paste the link into the terminal and use `wget` to fetch it.  
Untar and decompress the archive.

# File Permissions, Users+Groups

**rwXrwxr-x**  
**111111101**

Owner	Group	Other
<b>rwX</b>	<b>rwX</b>	<b>r-X</b>
<b>111</b>	<b>111</b>	<b>101</b>
<b>7</b>	<b>7</b>	<b>5</b>

```
ubuntu@ip-10-4-193-188:~$ tar xzf stacks-0.998.tar.gz
ubuntu@ip-10-4-193-188:~$ cd stacks-0.998/
ubuntu@ip-10-4-193-188:~/stacks-0.998$ ls -la
total 500
drwxrwxr-x  7 ubuntu ubuntu  4096 2012-01-09 22:24 .
drwxr-xr-x 20 ubuntu ubuntu  4096 2012-03-06 23:20 ..
-rw-rw-r--  1 ubuntu      11 aclocal.m4
-rwxr-xr--  1 ubuntu     27 autogen.sh
-rw-r--r--  1 ubuntu     23 ChangeLog
drwxrwxr-x  2 ubuntu      24 config
-rw-rw-r--  1 ubuntu     14 config.h.in
-rwxr-xr-x  1 ubuntu     11 configure
-rw-r--r--  1 ubuntu     51 configure.ac
-rw-r--r--  1 ubuntu     27 INSTALL
-rw-r--r--  1 ubuntu     27 LICENSE
-rw-r--r--  1 ubuntu     11 Makefile.am
-rw-rw-r--  1 ubuntu     12 Makefile.in
drwxrwxr-x  3 ubuntu     24 php
-rw-r--r--  1 ubuntu     56 README
drwxrwxr-x  2 ubuntu     24 scripts
drwxrwxr-x  2 ubuntu     24 sql
drwxrwxr-x  2 ubuntu     24 src
ubuntu@ip-10-4-193-188:~/stacks-0.998$
```

000	0
001	1
010	2
011	3
100	4
101	5
110	6
111	7

chmod 777 README

chmod 644 README

chmod 600 README

# What is a variable?



# What is a variable, ctd.

1. A variable can have almost any name:

- `foo`
- `bar`
- `cats`
- `line`

2. You assign it a value like this:

- `foo=32`
- `bar=27.4938193`
- `cats="LOLzzzz"`
- `line="sample_01.fq"`

3. You refer to it using a dollar sign:

- `$foo`
- `${foo}`

# What is a variable, ctd.

Variables often have types, depending on the language

integer	<code>1, 2, 3, 4, 5...</code> <code>-1, -2, -3, -4, -5...</code>
float (double)	<code>3.14159265358979</code>
string (of characters)	<code>"My dog is Billy"</code>

# What is a variable, ctd.

1. Try it out: set a variable on the command line:

- `foo=32`

2. Display the value the variable holds:

- `echo $foo`

3. Set a new value and display it:

- `foo="The cat likes thai food"`
- `echo $foo`

# Shell Loops

My favorite command: `ls -l`

The *while* loop

```
while read line; do command $line; done
```

Pipe `ls -l` to a `while` loop and watch magic happen

```
ls -l
```

```
fish_001.tags.tsv  
fish_003.tags.tsv  
fish_004.tags.tsv  
fish_005.tags.tsv
```

PIPE

```
while read line; do command $line; done
```

```
command: grep -c $line  
$line =
```



```
ls -l
```

```
fish_003.tags.tsv  
fish_004.tags.tsv  
fish_005.tags.tsv
```

PIPE

```
while read line; do command $line; done
```

```
command: grep -c "ACGT" $line  
$line = fish_001.tags.tsv
```

```
grep -c "ACGT" fish_001.tags.tsv
```

```
ls -l
```

```
fish_004.tags.tsv  
fish_005.tags.tsv
```

PIPE

```
while read line; do command $line; done
```

```
command: grep -c "ACGT" $line  
$line = fish_003.tags.tsv
```

```
grep -c "ACGT" fish_003.tags.tsv
```

```
ls -l
```

PIPE

```
while read line; do command $line; done
```

```
command: grep -c "ACGT" $line  
$line = fish_005.tags.tsv
```

```
grep -c "ACGT" fish_005.tags.tsv
```

1. “line” can be any variable name: foo, bar, etc.
2. multiple commands can be put together with a semicolon.

```
ls -l
```

PIPE

```
while read line; do command $line; done
```

```
command: echo -n "$line "; grep -c "ACGT" $line  
$line = fish_005.tags.tsv
```

```
echo -n "fish_005.tags.tsv "; grep -c "ACGT" fish_005.tags.tsv
```

1. “line” can be any variable name: foo, bar, etc.
2. multiple commands can be put together with a semicolon.

# samples.tar.gz

## 1. Expand the archive: `tar -xvf`

```
fish_001.tags.tsv  
fish_003.tags.tsv  
fish_004.tags.tsv  
fish_005.tags.tsv
```

## 2. Move into the samples directory

## 3. Execute a command that can identify the consensus sequences in this file.

## 4. Try out the `ls -l` command

## 5. Combine parts 3 and 4 with a while loop to count the number of consensus sequences in each file

```
4  
5  
4  
6
```

## 6. Modify the command to prefix each output with the file name.

```
fish_001.tags.tsv    4  
fish_003.tags.tsv    5  
fish_004.tags.tsv    4  
fish_005.tags.tsv    6
```


**while read line; do command \$line; done**

# Shell Scripts

1. Anything you can do on the shell can be placed in a shell script
2. Shell scripts often end in the suffix “.sh”
3. Shell scripts must be executable (chmod 755)
4. *Comments* can be written in scripts with a “#”
5. Variables can be used to shorten long paths
6. Shell loops can be used to process lots of files
7. “\” can be used to wrap long commands across multiple lines
8. #!/bin/bash must be the first line - specifies interpreter

# Shell Scripts, ctd.

What is an array?

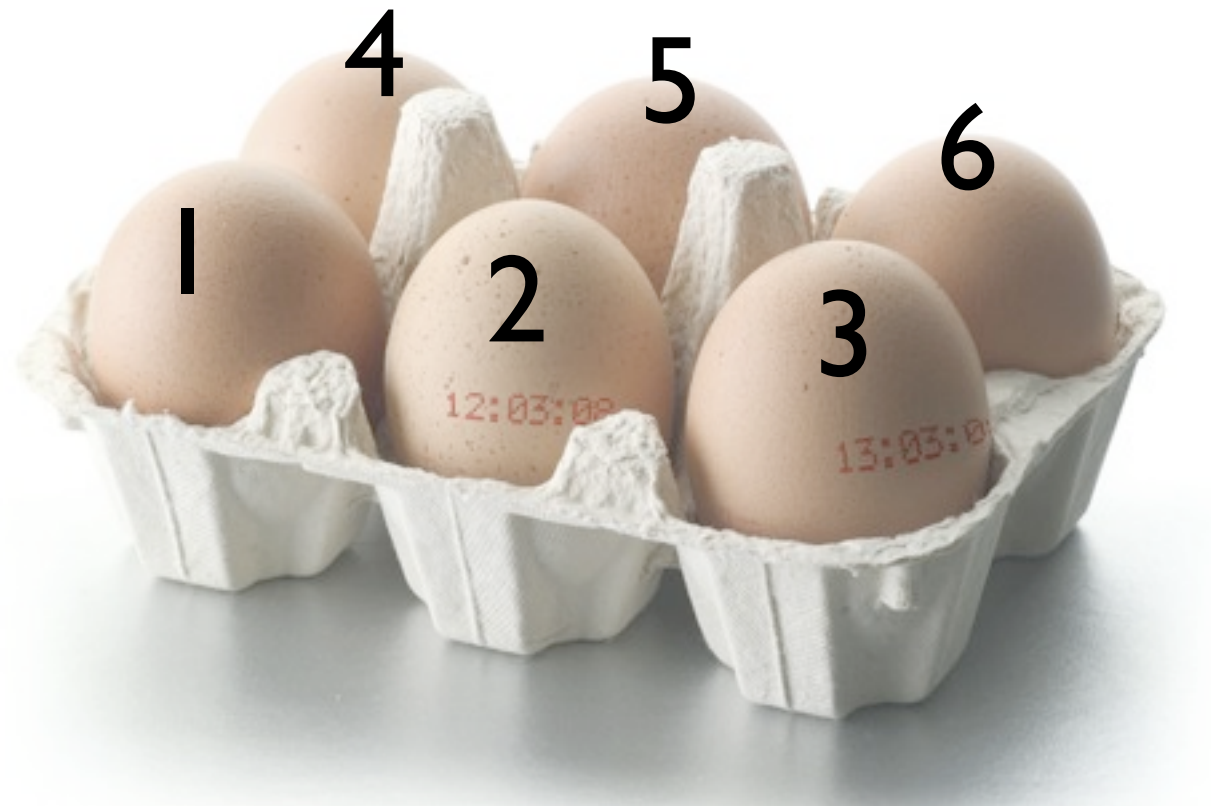

# Shell Scripts, ctd.

## What is an array?

1. A variable can have almost any name:

- `foo`
- `bar`
- `cats`
- `line`

2. You assign it a value like this:

- ```
foo="progeny_10.fa
progeny_11.fa
progeny_12.fa
progeny_13.fa
progeny_14.fa
progeny_15.fa"
```



# Shell Scripts, ctd.


```
[catchen@genome]:~/research/seq/dre_hap% more build_tags.sh
#!/bin/bash
```

```
ROOT=$HOME/research/seq
bin=$ROOT/radtags/stacks/trunk/
src=$ROOT/dre_hap
db=dre_hap_radtags
batch_id=1
date=2011-05-17
desc="Danio rerio haploid map"
```

```
cd $bin
```

```
nice -n 19 $bin/scripts/denovo_map.pl -m 3 -B $db -b $batch_id -t -a $date -D "$desc" -e $bin -T 40 \
-o $src/nstacks \
-p $src/samples/female.fq \
-r $src/samples/progeny_01.fq \
-r $src/samples/progeny_02.fq \
-r $src/samples/progeny_03.fq \
-r $src/samples/progeny_05.fq \
-r $src/samples/progeny_06.fq \
-r $src/samples/progeny_08.fq \
-r $src/samples/progeny_09.fq \
-r $src/samples/progeny_10.fq \
-r $src/samples/progeny_13.fq \
-r $src/samples/progeny_14.fq \
-r $src/samples/progeny_16.fq \
-r $src/samples/progeny_17.fq \
-r $src/samples/progeny_18.fq \
-r $src/samples/progeny_19.fq \
-r $src/samples/progeny_20.fq \
-r $src/samples/progeny_23.fq \
-r $src/samples/progeny_24.fq \
-r $src/samples/progeny_25.fq \
-r $src/samples/progeny_27.fq \
-r $src/samples/progeny_33.fq \
-r $src/samples/progeny_34.fq \
-r $src/samples/progeny_35.fq \
-r $src/samples/progeny_36.fq \
-r $src/samples/progeny_37.fq \
-r $src/samples/progeny_38.fq
```

# Shell Scripts, ctd.

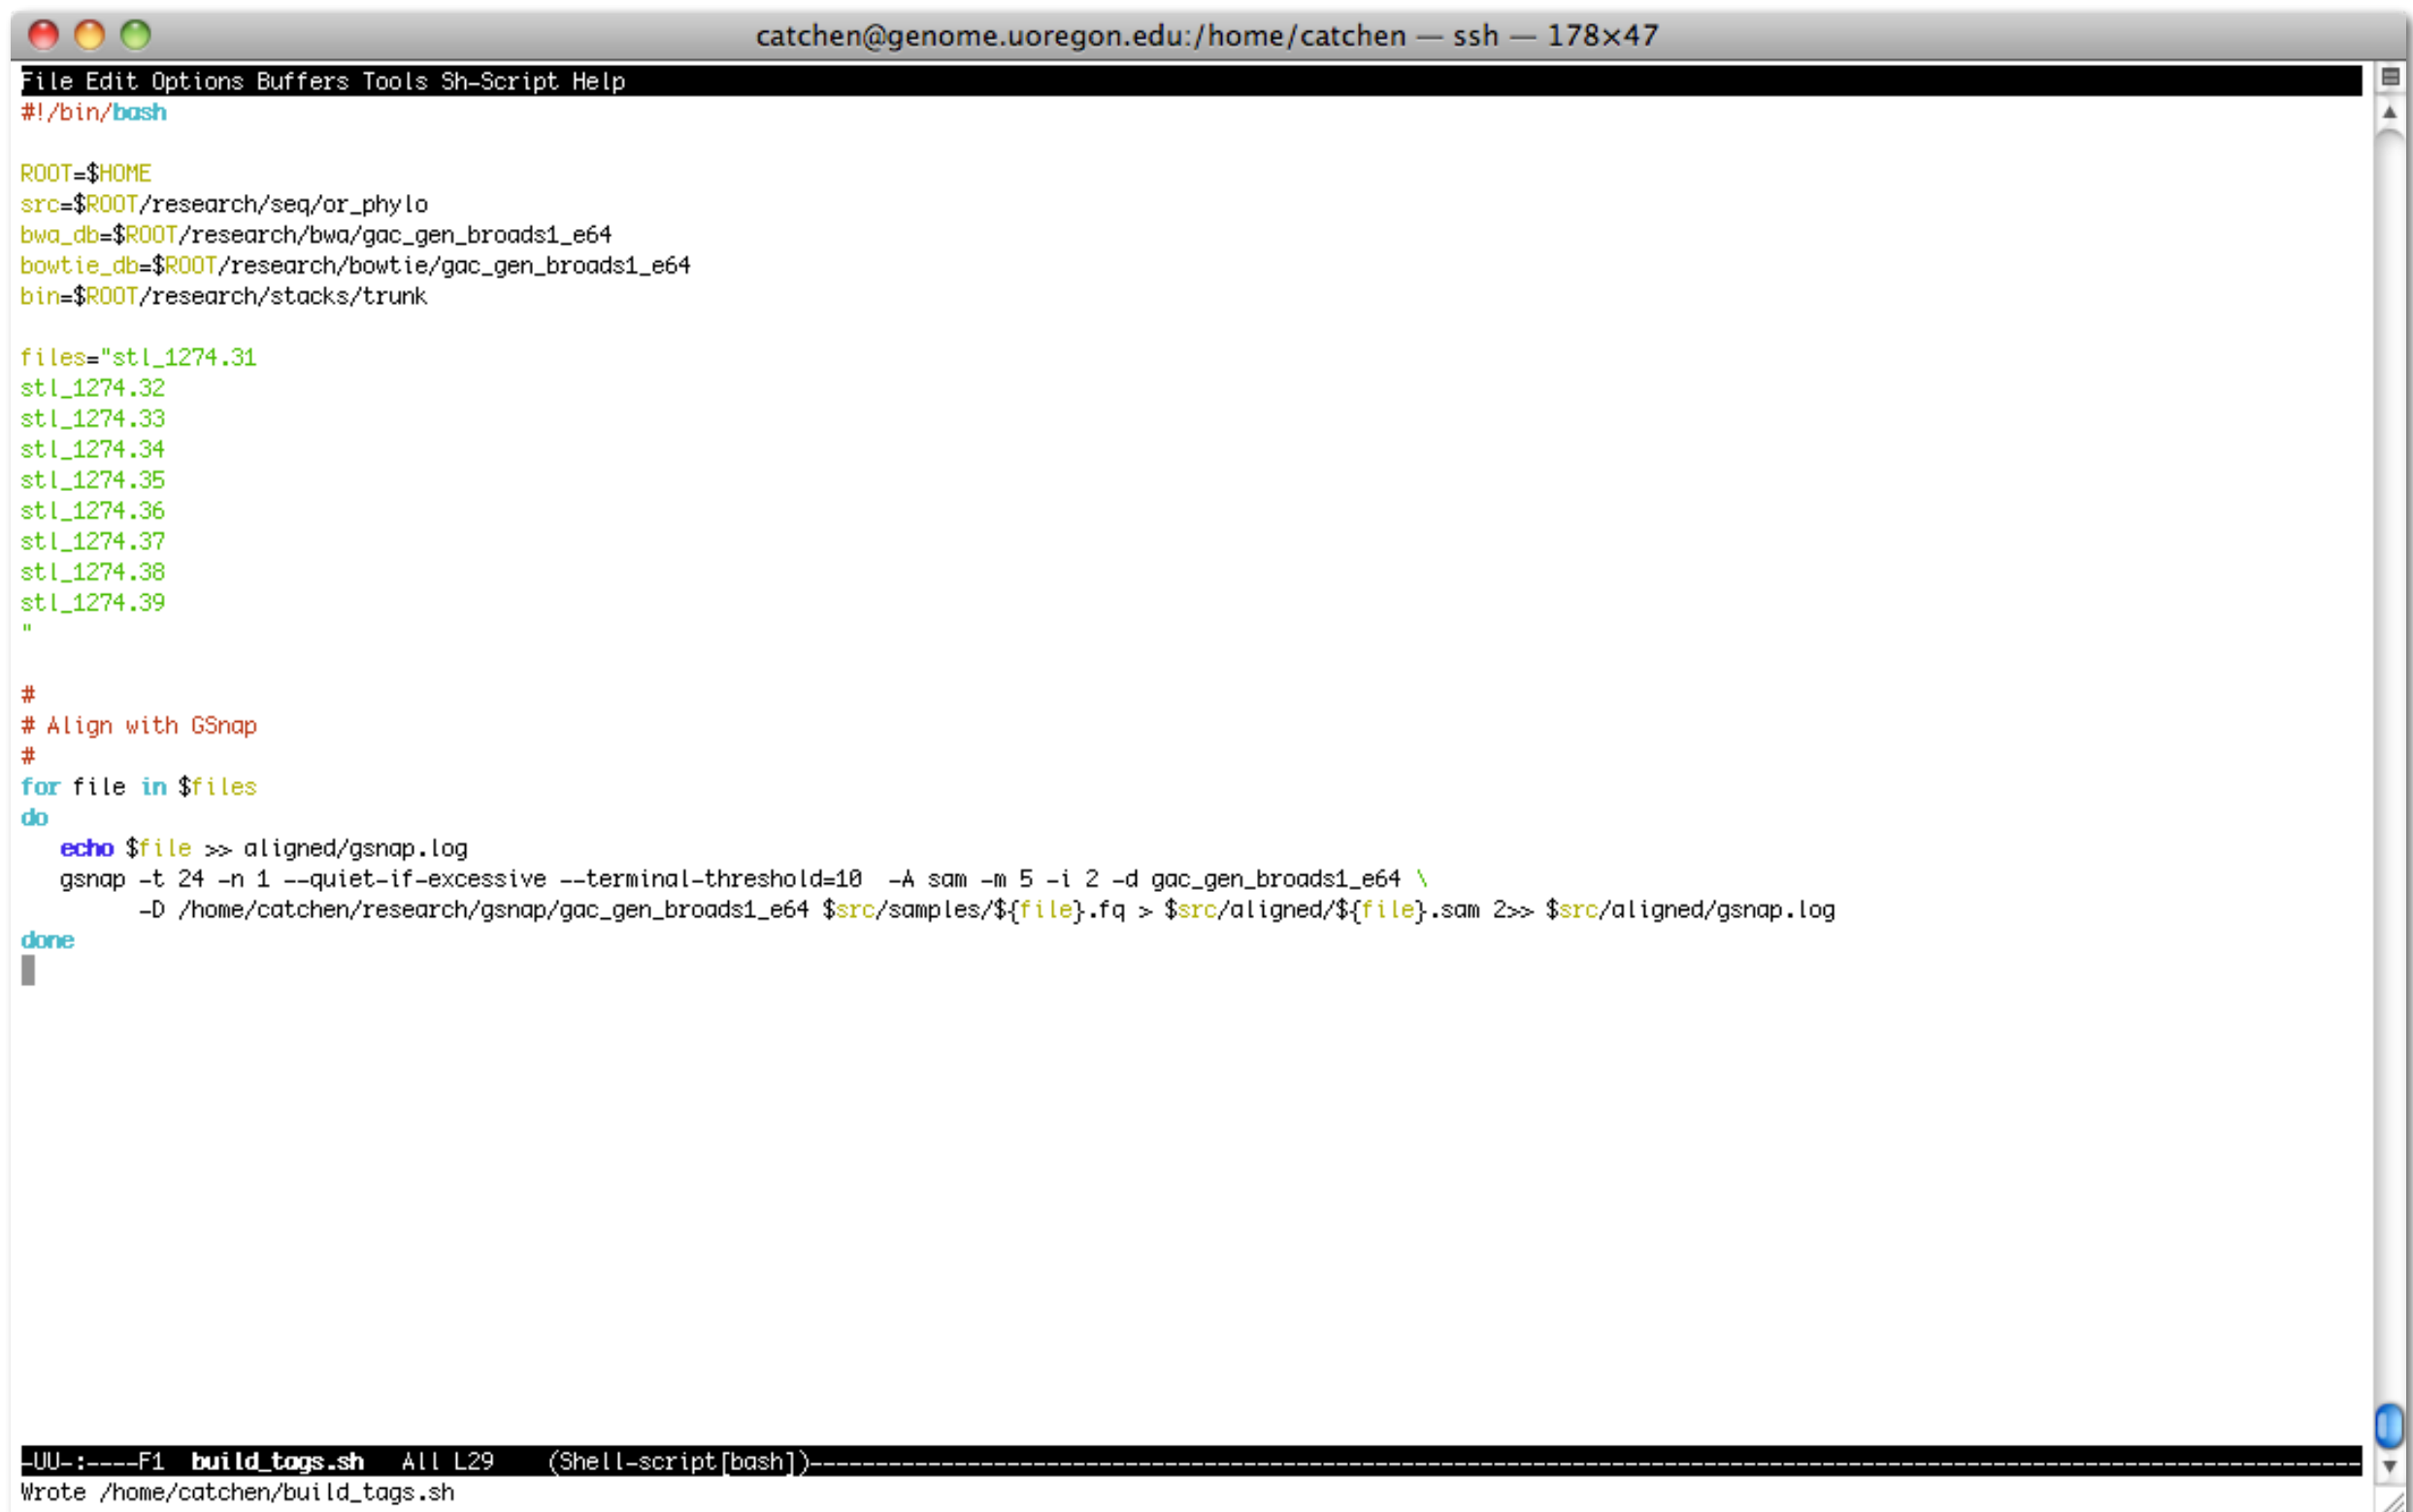

```
catchen@genome.uoregon.edu:/home/catchen — ssh — 178x47
File Edit Options Buffers Tools Sh-Script Help
#!/bin/bash

ROOT=$HOME
src=$ROOT/research/seq/or_phylo
bwa_db=$ROOT/research/bwa/gac_gen_broads1_e64
bowtie_db=$ROOT/research/bowtie/gac_gen_broads1_e64
bin=$ROOT/research/stacks/trunk

files="stl_1274.31
stl_1274.32
stl_1274.33
stl_1274.34
stl_1274.35
stl_1274.36
stl_1274.37
stl_1274.38
stl_1274.39
"

#
# Align with GSnaps
#
for file in $files
do
    echo $file >> aligned/gsnap.log
    gsnap -t 24 -n 1 --quiet-if-excessive --terminal-threshold=10 -A sam -m 5 -i 2 -d gac_gen_broads1_e64 \
        -D /home/catchen/research/gsnap/gac_gen_broads1_e64 $src/samples/${file}.fq > $src/aligned/${file}.sam 2>> $src/aligned/gsnap.log
done

-UU-:----F1 build_tags.sh All L29 (Shell-script[bash])-----
Wrote /home/catchen/build_tags.sh
```

# Shell Scripts, ctd.

`~/workshop_data/unix/seqs.tar.gz`

1. Move into the seqs directory
2. Use `ls -l` combined with a shell loop to count the number of lines in each file
3. Use a shell loop to concatenate the files into a single file, use the `>>` operator to redirect the output
4. Count the lines in the final file, make sure they match the sum of the lines in the individual files.
5. Create a shell script to do all of the above.

Advanced Bash-Scripting Guide: <http://tldp.org/LDP/abs/html/>

# Shell Scripts, ctd.

## The *for* loop

```
files="stl_1274.31  
stl_1274.32  
stl_1274.33  
stl_1274.34  
stl_1274.35  
stl_1274.36"
```

```
for file in $files  
do  
    commands  
done
```

# Shell Scripts, ctd.

`~/workshop_data/unix/fst.tar.gz`

Your goal is to prepare these  $F_{ST}$  data files for plotting. We need to separate the data by chromosome.

1. Expand the archive and move into the fst directory.
2. Use `ls -l` to determine a list of files to examine.
3. Use `cut/grep/sort/uniq` to determine a list of chromosomes to process, ignoring scaffolds.
4. Work out the command to extract the chromosomes from one  $F_{ST}$  file and redirect them into their own file.
5. Write a shell script that uses two shell loops, one nested inside the other, to separate each  $F_{ST}$  file into separate files, one for each chromosome
6. Add variables to make paths absolute.